

PVCstrip.com makes the job of hanging strip doors even easier with our J-Hook strip door system. The J-Hook design eliminates multiple studs and fasteners, and ensures a simple, fast installation. A 3' x 7' strip door can be installed in a matter of minutes. Simply attach the mounting bracket to the wall, slide the J-Hook Strips into the bracket and install the locking screws at each end to hold the strips in place. No more time consuming layout, measuring or calculating overlap of strips. J-Hook strips are designed so that they install and establish a preset overlap when you slide them into the bracket.



Applications

- Retail
- Supermarket
- Distribution Centers
- Warehouses
- Manufacturing
- Restaurants
- Cold Storage Facilities

Environment

- Freezer
- Cooler
- Personnel
- Interior
- Exterior
- Loading Dock
- Washdown

Traffic

- Personnel
- Cart
- Pallet Jack
- Light Forklift Traffic

Options

- Standard Clear
- USDA Low Temp
- Ribbed
- Low Temp Reinforced

Mounting Brackets

Low profile aluminum extrusion is inherently strong and maintains a minimum clearance from the wall. J-Hook strips slide easily into the bracket for installation, and can be quickly replaced when necessary.

J-Hook Sliding Hanger and Strip Material

The J-Hooks have a continuous welded bond between each strip. 6" and 8" strip material has a standard 2" overlap on each side. The strips are tapered, making installation fast and easy. If the strips ever come unsealed from the J-Hook we guarantee free replacement including freight.


Hangs Flat Right Out of the Box

No need to lay strips out for 24 hours prior to installation. When you are ready to install, just open, hang and you are done!

Installation is Easy as 1, 2, 3!



Attach the mounting bracket to a flat surface above the opening.

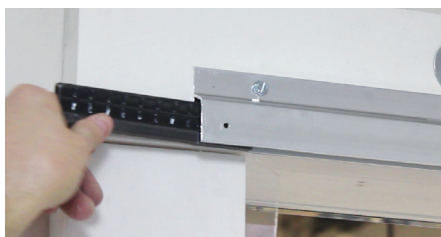

Start at either end & slide the J-Hook Hanger/Strips along the center track in the bracket until all strips are installed.



Install a locking screw in each end of the bracket to hold the strips in place and you are done – fast and easy!

J-Hook Strip Door

Product Details - Specifications, Door Sizes & Material Options

Door Components

Strip material shall be 6" or 8" wide. 6" wide shall be 6" x .060" thick with a 67% overlap. 8" wide shall be 8" x .080" thick with 50% overlap. Material choice shall be Standard Clear, Ribbed, USDA Low Temp and Low Temp Reinforced. Ribbed only available in 8" x .080". Strips shall have a continuous welded bond to the J-Hook hanger. Strips to overlap 2" per side and shall be flush with the end of the bracket. The J-Hook Strip Door is available in the following sizes:

6" x .060" Thick with a 67% Overlap

Widths - 26", 30", 34", 38", 42", 46", 50", 54", 58", 62", 66", 70", 74", 78", 82", 86", 90", 94", 98"
Maximum Height - 120"

8" x .080" Thick with 50% Overlap

Widths - 26", 32", 38", 44", 50", 56", 62", 68", 74", 80", 86", 92", 98", 104", 110", 116", 122"
Maximum Height - 120"

Mounting Hardware

Mounting bracket is a one piece extruded aluminum bracket for face of wall mounting or in-jamb mounting. Center track accommodates J-Hook hangers.

Fabrication

Provide strip door assemblies manufactured as integral units ready for assembly and installation. Mounting Bracket: for metal surface exposed to view in completed work, provide materials with smooth flat surface without blemishes. Do not use materials with exposed pitting, seam marks, roller marks, rolled trade names or roughness.

Installation

Install doors in accordance with PVCstrip.com instructions and standards.

Material Options

Standard

Our clear PVC strips are designed for use in most walk-in coolers or in doorways at ambient temperatures with personnel, cart, pallet jack and light forklift traffic.

USDA Low Temp

Clear PVC formulated to remain pliable in food service freezer temperatures; also for use in areas where USDA accepted material is required.

Ribbed

Our standard and USDA grade PVC strips can be fabricated with "locking" ribs to seal against air flow in cooler or freezer temperatures. Ribs also preserve strip clarity by absorbing abrasions. Only available in 8" x .080".

Low Temp Reinforced

Nylon reinforced strips remain pliable in freezers subjected to heavy personnel, hand truck or fork lift traffic.



In our continuing effort to improve our products, some specifications or descriptions may change. We reserve the right to make such changes without notice or recourse.